




MANUFACTURING

YARD LEVELER


*The All Purpose Yard and Road Leveler
For Farm and Utility Uses*

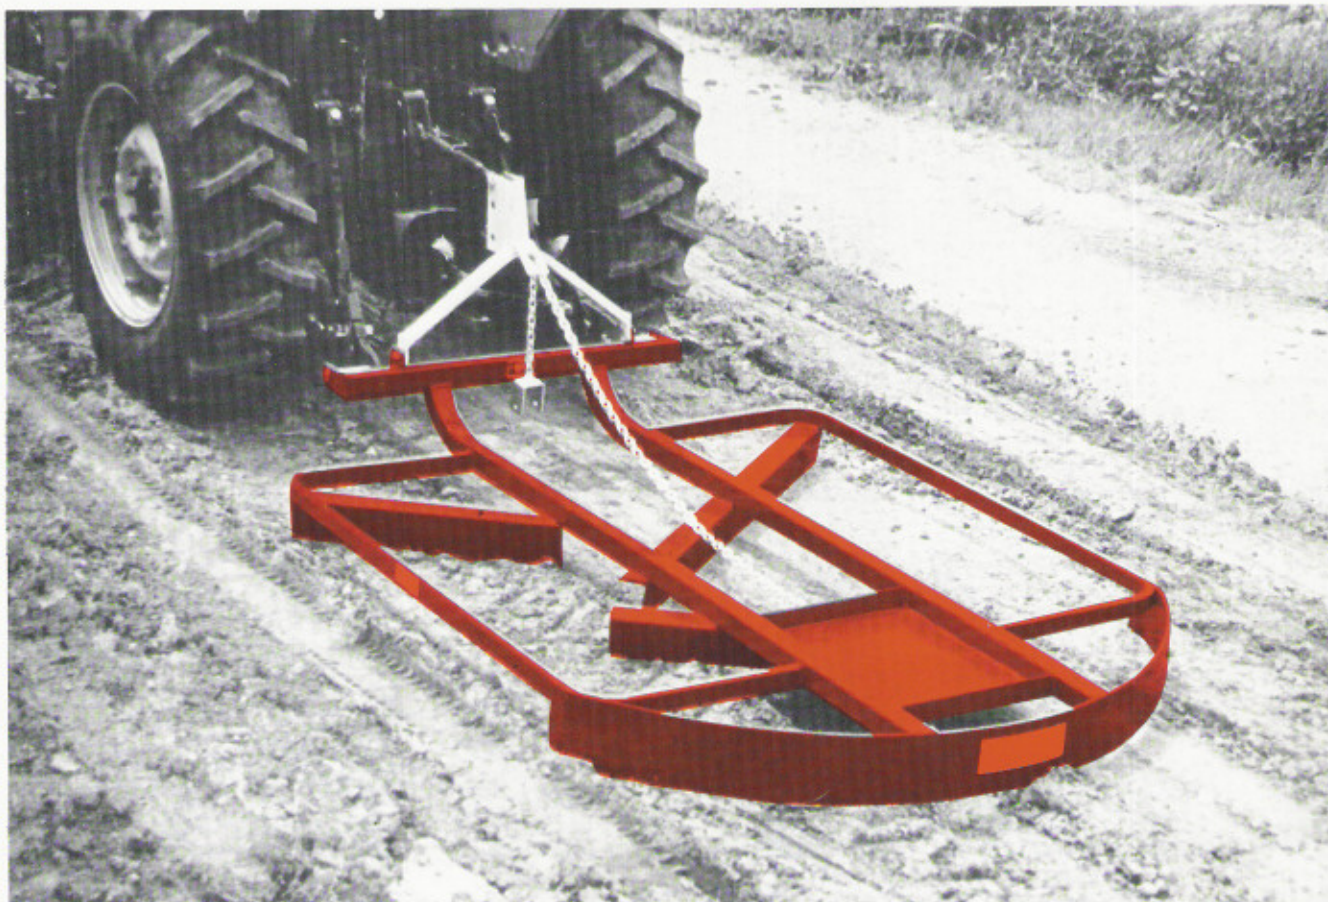

- 4', 6' and 8' wide models adapt to a variety of applications.
- Floating design prevents ridges yet fills in holes and ruts.
- Uses include farm yards, lanes, township roads, racetracks, landscaping and road shoulder maintenance to name a few.
- Weight box allows weight to be added to increase cutting aggressiveness.
- Angle cutter bars cut and stir gravel and curved rear member carries material to fill in holes and ruts.
- Can be used as a 3 pt. or pull type model.



The Yard Leveler can easily be converted from 3 Pt. Hitch to a pull type unit. The lift chain is moved from the rear clevis to a clevis at the front. A clevis is provided to drop a pin through pick up hitch. Unit will pull straight and is an ideal set-up for long lanes or township roads.

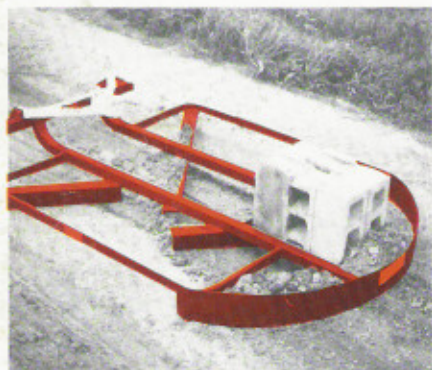

Weight can easily be added to make the leveler more aggressive. Angle bars cut off high spots directing material flow to the rear. Enough material is carried in the rear portion to fill holes and ruts. Excess merely spills over the top.



The 4' model has a Cat. I, 3 Pt. Hitch. The 6' and 8' models have Cat. II, 3 Pt. Hitches. Top link can be adjusted to fit each tractor. The 3 Pt. will adapt to most quick hitches. The chain pull shown is where pull chain hooks to leveler when used as a pull type model.



Top chain is used to lift unit during transport, yet allows the leveler to float over surface without gouging or skipping. This feature is what makes the yard leveler far superior to a rear mounted blade, which will not float. Maximum added weight recommended is 150 lbs.

SPECIFICATIONS

Item No.	Mfg. No.	Description	Wgt. Lbs.
130-08461	YL83-4	4' Yard Leveler	280
130-08479	YL83-6	6' Yard Leveler	397
130-08487	YL83-8	8' Yard Leveler	462



TEBBEN MANUFACTURING
West Highway 7
Clara City, Minnesota 56222
Phone 612-847-3512

DISTRIBUTED BY